



free mounting kit

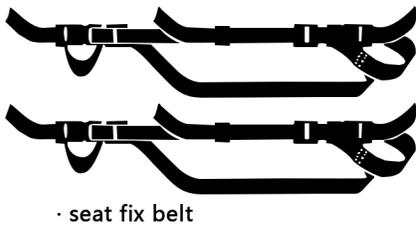


· seat fix belt

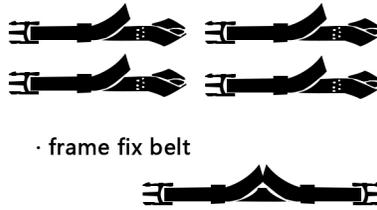

· frame fix belt

· bag fix belt

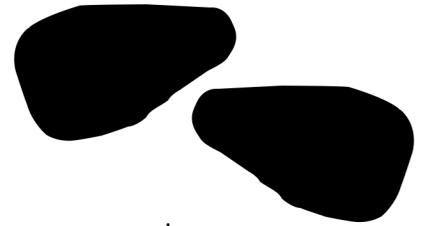

· rain cover

material: POLY 600D·PVC


overall dimensions of bag part : L295xW230(320)xD470

instructions



1. Installation to the Seat

Open the base, fix it on the seat through the seat strap, pull it tight after putting the bag on, adjust the distance between straps and the belt, and then pull the braided belt tightly so that it firmly holds the seat.

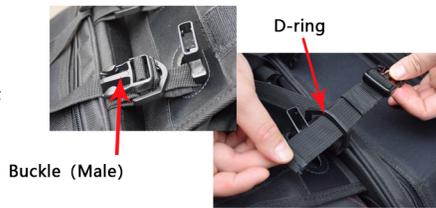

Buckle (Male)

2. Connecting the saddle bag to the seat straps

Firstly, the male buckles should pass through the hole of the saddle bag connecting piece, then the male buckles pass through the D-ring, then tighten the cord of the buckle holder by pulling it firmly.



3. Two saddles wrapped together

The opposite saddle bag can be attached according to step 2 as well. The left and right bag should be balanced out. If not, you should pull one of the straps. If the left and right turning lights are affected, the tightening belt under the bag can be pulled, and the bottom can be pulled down to make the turning lights conform. The bags can be attached to the velcro surface. This ensures a safe connection.



4. Frame Fixed Belt

On the front side of saddle bag, the frame fixing belt is used to fix the bag to the frame, by creating a knot. Then the male button should slide into the female and the belt can be fixed to the bike by pulling the belt.

Buckle (Male button)

5. The rear side of the saddle pack is fixed to the frame under the body, it can also be fixed to the bag itself as seen above. This way the bags cannot move from the body.



WARNING! (Read before installation)

The improper installation method of this product may cause accidents.

- After the installation of this product, check whether there is any abnormality before driving. If an abnormality is found, it must be eliminated before it can be used normally.
 - If any abnormality is found in the course of driving, you must stop riding, check and find it until the abnormality is eliminated, then you can continue riding.
 - Make sure that the driving position is not affected when you install it. Pay attention to the shape and position of the Side package seat, side rainproof cover, etc.
 - Pay attention to check the sagging of saddle bag caused by driving vibration and tighten it in time, fasten the belts in time.
 - The saddle bag is close to the exhaust pipe. Although it has been reinforced and sewn, it may still cause damage to the contact part of the saddle bag at high temperature.
 - Single side bearing weight is 3kg, please avoid overweight
 - The load on both sides of saddle bag should be averaged to avoid unilateral overweight. Otherwise, it will lead to unstable driving of vehicles and lead to danger.
 - After expanding the capacity, the width of both sides increases. Please pay attention to the width of the vehicle to avoid the collision caused by too wide saddle bag.
 - It is forbidden to load sharp articles in saddle bags, which will lead to unpredictable damages such as piercing, tearing and wearing of saddle bags.
 - When opening the zipper to take out articles, it is necessary to open them in turn along the zipper. Violent pulling is prohibited, which will cause damage to the main cover of saddle bag.
 - This product is used under the premise of the statutory speed. Never exceed the speed limit. Otherwise, it will lead to unpredictable situations in the course of driving.
 - The attached rainproof cover is only used in emergency situations. When using it in rain, consideration should be given to placing the contents of the bag in a special waterproof bag.
 - It is forbidden to carry inflammable and explosive articles in bags. Items prone to fire should not be placed in saddle bags.
 - Chemical products will lead to the aging of cloth and damage the service life of saddle bags.
 - Avoid prolonged exposure to ultraviolet light, which can lead to discoloration and over-aging of products.
- All these warnings should be taken seriously to ensure a safe and happy ride. And remember always pay attention to the road And never exceed the speed limit nor create a dangerous situation. Drive carefully and enjoy the ride!